



***SOUND-  
PROOFING  
THE LIGHT  
AIRCRAFT***

***A “How-To”  
Manual***

©1992/1997 Bill Nash

October 2004

### *Introduction*

*We first put these ideas down in 1990, in the form of an instruction sheet that we handed out with Super Sound Proofing foam mat. Over the years we've expanded them, mostly by feedback from users of the product and have printed thousands of these little booklets.*

*You are invited to pass back your experiences with this and the other products that have been added to our arsenal in the fight against noise. We now have acoustical foam materials to be used in Boats, Trucks and Cars as well as new materials used in Architectural applications for home wall & ceilings, sound studios, gyms, industrial as well as for band practice in the garage!*

*Our specialty is aircraft applications as it is the most challenging! We are always available for free consulting at anytime for any application, to help you with what we know about methods and materials for soundproofing.*

*We'll provide free copies of this booklet to groups and associations; just let us know how many you need.*

*The latest version of this manual is available from our website at*

<http://soundproofing.org/infopages/soundprf.html>

© Copyright 1998/2002/2004 by /Bill Nash - all rights reserved.  
Reprint rights granted when full credit is given.

Logbook Certification letter:

SUPER SOUNDPROOFING CO  
P.O. Box 985  
Vista, CA 92085  
(760) 752-3030  
October 13, 2004

**RE: FAA CERTIFICATION OF "SUPER SOUNDPROOFING"  
MATERIAL**

**To Whom it May Concern:**

This letter provides information regarding Super Soundproofing Material for which we are the mill distributors. This letter is to certify the material has FAA approval obtained by testing at a FAA approved lab..

**Our Super Soundproofing Materials are,**

- 1) a vinyl-nitrile closed cell expanded foam.
- 2) a brush on liquid.

These have been tested by an FAA approved laboratory that has determined the material, in all thicknesses, meets or exceeds, the flammability test criteria that is contained in CFR 25.853(a) APPENDIX F, PT 1(a)(1)(ii). Lab test results are available on request..

This material, in all thicknesses, meets various portions of U.L. Lab criteria regarding different qualities and parts of D.O.T. "Proposed Guidelines for Flammability and Smoke Emission Specifications."


In addition, the material meets MIL Spec. MIL-P-15280-H Form S. regardless of its thickness.

I herewith certify the above is true and correct.

William Nash

General Manager  
Super Soundproofing Co

Questions? Certs? We are happy to offer recommendations, advice, assistance and free samples, or a hard copy of this booklet. Just call or write us.

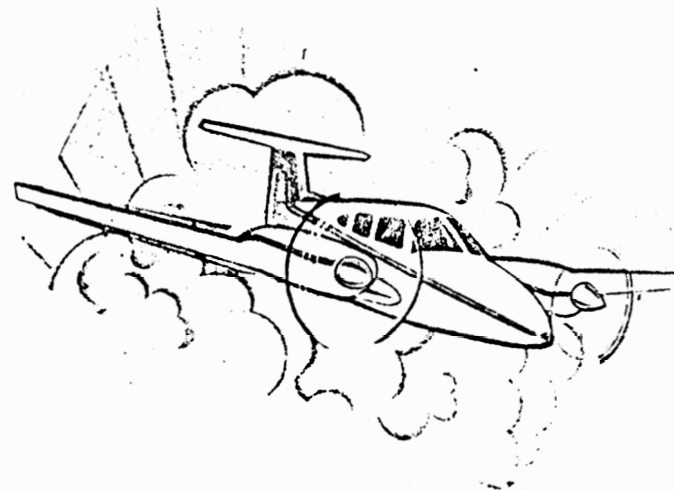

*SOUND PROOFING*

*LIGHT AIRCRAFT*

Much has been discussed as well as written about the noisiness of aircraft - inside and out. Because of valid concerns, sound measurements have been made that indicate that sometimes the noise levels are so high in some aircraft that damage to the hearing over the long term can, and indeed does, result. Advanced techniques now exist to drastically reduce such noise. While time and expense are important considerations, installing soundproofing is not a luxury; it is an investment in the physical well being of the flyers in addition to a valuable upgrade of the aircraft. Information presented here is applicable to all types of planes from "puddle-jumpers" to jets.

The addendum to this booklet has info regarding other vehicles as well as business, shop and office.

In a properly soundproofed airplane, the radio can be used with speaker and hand mike, instead of only the headsets. You will

even enjoy better direct communications between passengers and will not have to worry about damage to your hearing. Contrary to popular belief, just wearing headsets will not protect your hearing. After being properly soundproofed, using the latest space age materials, the noise level in most aircraft will be so low you'll probably be able to have conversations in mostly normal tones. You'll wonder why you ever put up with all the noise before. The quieter aircraft will seem to have gained quality and feel more solid and plusher. Such an improvement should not be considered costly.

Before we tell you how to accomplish this, we will discuss some commonly used materials for sound attenuation. Also, keep in mind that soundproofing involves two (2) concepts that require two different kinds of materials:

1. *Sound absorption, and*
2. *Sound blocking, or barrier material.*

Vibration of the airframe, penetration of sound into the cabin from the engine/prop, and airflow over the airframe are three distinct effects and you need to use the proper materials to control them. We have found the ordinary "foam rubber" and fiberglass batting as supplied by the aircraft manufacturers to be virtually worthless.

#### "Super Soundproofing" Mat for Sound Absorption:

It is a closed cell vinyl/nitrile insulating material, which will not absorb water or oil. Materials that absorb liquids are not suitable because if they get wet, they will promote corrosion and increase their weight. The mat also conserves and blocks heat and preserves cold: because it is an insulator. It has fire retardant qualities and we have conducted burn tests that it meets the requirements of FCFR 25.853a. APPENDIX F, PT 1(A)(1)(ii) Therefore, it is suitable for aircraft use. (Copies are available).

It is available in 48" widths in thicknesses of 1/8, 1/4, 3/8, 1/2, 3/4, 1 and 2 inch. It may easily be cemented together with contact cement to make other thicknesses.

#### The Noise Mat Barrier:

If one were to make a mat of sound absorbing material rather thick and use a metal barrier inside it, it would be very effective in really stopping engine noise coming through the firewall. So, if ordinary kitchen Reynolds Aluminum Foil is sandwiched between the mats (use contact cement), most of that noise will be prevented from entering the cabin. A 2" minimum total thickness is recommended. (Two 1" thicknesses).

#### Mat Barrier: Finish cloths and Vinyls

These are available from your local automotive upholstery wholesaler in a myriad of thicknesses and colors. Most types of automotive materials meet some auto industry inflammability requirements, but perhaps not specifically those as applied to aviation. It is the duty of the installer to make sure that applicable F.A.R.s are complied with. You can use a spray coating to accomplish this.

For aircraft applications, you would be interested in thin vinyl materials such as used for automobile headliners and durable cloths that have thin foam backing. These can easily be drawn tight and contact cemented to the above-described soundproofing mats (or metal backing panels), to produce very attractive, professionally finished surfaces. The use of contact cement in spray cans simplifies application. A heat gun (hair dryer) and some moisture will shrink out most wrinkles.

#### Other types of soundproofing materials

*A mention should be made here of some popular materials marketed by others. One is a white foam material that is provided in a kit, specially cut for each aircraft it is designed for.... It has contact cement on one side with a peel-off covering and comes with a diagram as to where each piece fits into the aircraft. This is a very expensive proposition because all this prep work has been*

*done for you and you are charged accordingly. A lot of time is wasted trying to find where each piece fits. These kits can run up to \$3000 per aircraft (and more) plus installation.*

*Another one is a lead-backed material developed for the military. It is so expensive and heavy it would not be a contender for installation in light aircraft, even airliners, even though it can sometimes be found surplus. Other materials are either not F.A.A. approved, not closed cell material or are far more costly than our proven Super SoundProofing Mat! Check carefully before you buy!*

#### Installation Considerations:

Each aircraft has its "hot spots". That's certain areas where noise is the loudest. A good soundproofing job would concentrate on these places that are the noisiest by placing more material there. However, in general, the places in a light plane that admit sound most readily are the firewall, cowl forward of the windshield/instrument panel, kick panels, sidewalls of the cabin, roof and wing-roots. But the honor of the noisiest goes to the windows! When replacing windows, use the thickest material you can. (We found thicknesses of over 3/8 Plexiglas were not worth the added expense).

A thorough soundproofing job would place heavier layers of materials where the sound was the loudest, near the front and lighter insulation aft. The entire cabin should receive the treatment, above, below and all around, including doors.

In an aircraft that has been flying, the best time to put in this material is when the interior has been removed. Then it can be installed with a minimum of effort. However, an installation can be made piecemeal. That is, section-by-section, as the budget or time allows, with steadily improving results as more and more of the cabin area is insulated. Some installers might do the doors on a weekend, the firewall on another, etc. In all cases, investigate thoroughly for evidence of corrosion or other damage before applying any batting that might cover it up.

While we cannot provide explicit instructions for each and every aircraft, we can give you some general pointers to insure a good effective job.

- *Installation; Soundproofing Mat*

1. Cut your material to precise size and shape beginning with the largest area.

The material comes in different thicknesses to be cut to fit inside and to fill the formers and frames, cabin sides and ceiling. (See diagrams). We do not recommend using razor blades or knives. They will leave ragged edges. Cut it with an electric knife, the kind that is used for carving turkeys. We use a Hamilton Beach battery-powered unit. These are inexpensive home appliance models. The rechargeable feature is handy where an AC plug-in isn't available, such as out on the aircraft ramp tie-down area. Cut material a little oversized so that it fits *inside* the former or frame with a push tight fit. It comes with a smooth "skin" side and a rougher side. Either side can be cemented but the smooth side is more suitable. A thin dab of contact cement here and there will ensure that it stays put, but it should fit well enough so that it is quite tight. If the area you are covering is rather large, apply a coating of Super Sound Proofing Liquid Soundproofing and allow to dry first.

Use waterproof contact cement. Do not overdo the cementing because you may want to remove the material someday to look for corrosion, run wires, etc. Use a brush for this. You must put soundproofing every place where the inside of the skin is exposed, especially on the firewall and inside the upper instrument cowl and kick panel sides forward of the windshield. If it's difficult to cut and fit the material directly because of obstructions, make a cardboard pattern by which to cut and fit the material.

Take your time. Don't get into a hurry. Make it fit as neatly as possible. It goes without saying the material is to be installed

only on the cabin side of the firewall! If the inside firewall is covered with some kind of decorative "Mickey Mouse" firewall covering, or fiberglass batting, remove it. It may then be reinstalled, but it's probably better to just leave it off.

1. Use the bits and pieces left over to insulate the smaller remaining spaces.

Material can be contact cemented together to make larger pieces, so not much need be wasted. Window frames and 'U' channels can simply be pushed full of the scraps. Leftovers can also be used in the floor access panels by gluing them on the underside of the covers, then reinstalling the panels and access covers. If you have some left over, it's worth it to glue it to the inside of the belly access covers too. Every place sound can enter should be covered as much as possible, but installing the material everywhere inside the underside of the floor many times isn't practical. Don't worry, even without that, the sound reduction will be very impressive. If your plane is apart for repairs or overhaul, or an experimental under construction, a more complete job can be done. However, do not overdo the gluing job. If you do, the material can be difficult to remove if and when inspection is necessary in the future.

#### *AN ALTERNATIVE METHOD OF INSTALLATION FOR EVEN GREATER SOUND REDUCTION*

If your aircraft has 'snap-in' metal or fiberglass upholstery panels that are held in frames, we have had great success with the following method, which uses 1/2" or thinner mat material:

1. Remove all such panels. Or, if you don't have them, make some.

Cut your mat materials a bit oversized. Then carefully cement a 1/4" or 1/2" layer of material to the inside backside of the panel. Leave the edge of the soundproofing around the edge slightly

loose so that it can slide over the inside flange of the mounting frame. Here, because these panels are nonstructural, and inspection won't be necessary, a full even coating of contact cement on both the panel and mat and then assembly will ensure that the material will not come loose, ever.

2. Cut and fit thinner insulation material to the inside skin areas same as the application of the material detailed previously.

The idea here is to create a sound deadened boxed-in area with a dead-air space between the two insulation layers. This is very effective and lighter, but requires more time and effort.

#### *For First Time Construction*

- a. Those of you building planes will have good results by just using the material on the inside of the cockpit area as explained. However, in addition, if you wish to make removable upholstery panels as mentioned above, here's how:
- b. Using either very thin aluminum sheet (.015" is a good thickness), or very thin fiberglass sheet (some call it "tank Liner"), a bit thicker, cut it to the size of the area you wish to cover. Don't try to make the area to be covered too large or make the panel with curved edges or with compound curves. The squarer, the better.

Pop rivet aluminum "T" "H" or "C" channel, (obtainable from the Reynolds Aluminum stock rack at your favorite hardware store) to the structure of the area that your panel will be mounted. Cut, fit and trim it so that a fairly loose fit of all four sides of your panel is obtained. The channel you use must have a slot wide enough that will accept the panel and the folded over fabric upholstery material at its edge. It must not fit so tightly that it can't be snapped in or out of place by bowing it. If

needed, an upholstery 'snap button' can be judiciously placed here and there to hold it tightly.

Now, evenly glue 1/8" or 1/4" soundproofing mat to what is to be the front side of the panel, leaving about an even 1/2" or 3/4" or so open area up to the edges. This will make a cushioned panel when covered with your automotive finish fabric cloth or vinyl. Lay this upholstery finish covering material over your panel, using it as a pattern and cut it 2-3" oversize. Applying a coating of "Plio-Bond" (or several coats of contact cement) to the metal or plastic panel then allowing it to dry, will provide a proper base for gluing material to the back edge of your panel. Lay the panel, with soundproof mat down, on the backside of the finish sheet and pull it around to the back of the panel, pulling the wrinkles on the front out gently and cement it down. Do not glue to the front at all. If you start with the contact cement slightly wet, you can work out any wrinkles very easily. When dry, cut the backside material away evenly and neatly with a razor blade. Leave about 1" or so holding it. This creates a smooth, cushioned panel that will snap into your aluminum frame very professionally - better than in factory planes! Put more thin soundproof mat on the back side of the panel as explained earlier or even better, to the inside structure skin for additional "Super" soundproofing.

You can also simply wrap thicker mat with your upholstery finish sheeting, just gluing it to the back edge of the smooth backside as described, then gluing the foam panel in place. The spray on kind of contact cement is very useful here. You can spray and attach it directly to the smooth side if you wish. A little extra attention to the corners of your finish material will be worthwhile for a neat job. A glue like "GOOP" works very well for this.

#### Larger Aircraft such as Airliners.

Cabin walls will need to be insulated thoroughly in the manner explained above. Many times soundproofing of these types of

aircraft is usually done perfunctorily by workers who have no idea what it's all about. Without some knowledge and careful attention to detail the consequence is a soundproofing job that is not very effective.

#### A Special Note About Helicopters.

An application of the thickest material available (we can supply it up to 2" thick and these thicknesses may be contact cemented together for even thicker) installed between the rear cabin and engine/transmission will result in a definite, noticeable noise reduction. Most of the time this is easy to do as these areas are usually quite accessible. It may also be cemented to the inside upper bubble, seat backs and in the underside floor areas for even better results. This may not have a totally silencing effect on the flying noise, but can make conversation possible when on the ground without having to reduce power or use the intercom. The best results will be had by then cementing a layer of Reynolds Aluminum as a "Noise Barrier" into the mat as was explained. If the back firewall is open, mat may be placed on it as well.

#### About Fireproofing Ratings....

The Federal Trade Commission says that there are no existing test methods or standards devised to prove the flammability of any material. Or are there accurate indicators of the performance of cellular plastic materials under actual fire conditions. Almost any material will burn under the "right" conditions. The test procedures of CFR 25.853(a), U.L. 94 or "Class A" are intended only as measurements of the performance of materials under specific controlled conditions. These tests generally mean the material will burn, but not support a flame, or will not support a flame but will create smoke. You can get a good idea about any material you intend to use by burning a scrap of it with a match. Materials used by aircraft manufacturer's years ago may not even meet present day "standards." Generally, if a person is responsible for

returning a certified aircraft to service as a shop or mechanic, he should use materials that are FAA approved and follow approved procedures. If it is in the experimental category, you can use whatever you wish. For certified aircraft, a letter is included here in this booklet certifying that it meets requirements of CFR 25.853(a). One may wish to place the letter in the aircraft logbook. Copies of the FAA certified laboratory burn tests are available on request.

### Soundproofing Ratings.

We haven't provided charts and graphs here because these theoretical ratings are pretty much meaningless in the practical, real world.

However, there are useful methods of judging the effectiveness of a soundproofing material by measuring its absorption and transmissibility properties.

### Weight, How Far To Go

There is a weight penalty, of course. The Super Soundproofing Mat weighs from .10 pound for the 1/8" to .5 pounds for the 1" material. (Per sq. ft.) A roll of the popular 1/2" X 50' (200 sq. ft.) mat weighs about 50 Lbs. Obviously, if you put it all in your plane, that's what the weight increase will be, less, of course whatever you pulled out. Generally it takes about 3/4 of a roll of 1/2" mat to do a good job on an aircraft such as a Cessna 182. (About 30 Lbs).

Such weights are not much of a consideration in a heavy twin, but can mean a lot in an ultralight. Common sense counts here. If a few extra pounds of soundproofing, perhaps even combined with an attractive interior offends your pocketbook or sensibilities, perhaps an additional investment would be made in noise-canceling headsets for everyone! In such a case, your wallet will be the one undergoing a dramatic weight reduction! And you thought acoustical material was expensive! Remember, headsets will not protect your hearing in the long

term. In general, even a little material is better than none. Usually, more is better, is the rule.

### More Noise Reduction Recommendations

The neatness and care that is taken to ensure a good tight fit and through application of the foam to the inside skin areas in forward part of the cabin will determine the effectiveness of your soundproofing job.

There is only so much one can do as a lot of sound will still come through the windows. Flat acrylic sheet can be obtained from a plastics wholesaler and cut to fit your old windows patterns is much cheaper than buying precut windows. Those of you who are building experimentals, overhauling or rebuilding aircraft should consider replacing windows with the thickest possible material available (up to 3/8"). Our tests have shown little advantage in using thicker material than that. Thick plexiglass sheet edges can be trimmed with a router to make them fit the thinner frame holders. (Go slowly, use care to avoid small cracking).

A fiberglass batting made special could be used on the firewall to help reduce sound coming through.

Loose fitting fairings in a high wing aircraft can allow lots of noise and should be stopped by caulking the gaps. Use white silicone if in a white area. The caulk should be applied with the fairing loose, the tightened somewhat to make a gasket type seal. Stuffing the soundproofing foam into wing root areas will help too.

A noisy door because of a gap in the frame can let in a lot of noise. Check the seal and replace if needed.

### Super Sound Proofing Liquid!

This is a lightweight insulating material designed to add mass to metal surfaces thereby reducing reverberant sound. Several

coats can be built up to suit sound proofing need. It also acts as a sound absorption/barrier where mat cannot be applied. Use it in tail cones; under flooring panels, on firewalls and in corners mat cannot go. Brush on, available in pints, quarts and gallons. Cleans up with water. Now FAA Approved!

### Super Sound Proofing Flooring!

By popular demand, we are now making our flooring mat available. We've combined a tough, wear resistant vinyl surface with a layer of closed cell foam to cushion and isolate noise and vibration. It is designed for floorboards and firewalls in vehicles, including aircraft. Thickness is about 3/8" and can be had with and without the foam backing. (Then it's 1/8" thick). It comes in 54" widths sold by the running foot.

*In any event, we're here to help you with any questions.*

#### Addendum to "Soundproofing the Light Aircraft" For Boats, RVs and Cars

The principles and applications described in the foregoing for aircraft are completely applicable to other vehicles and even homes and offices. Absorption and blocking of noise are the primary principles and of most importance. How well this is accomplished is a measure of the effectiveness of the soundproofing<sup>s</sup> job. First, we will discuss some specifics of soundproofing certain kinds of vehicles and the specialties of noise reduction in the business, shop, home or office.

- *Autos/Trucks*

In this application the two principle sound producing items are road noise and engine noise. These are dealt with somewhat differently. However, in most cases the method of absorption is used. The engine compartment usually has pretty good noise blocking capabilities, so lining the compartment inside and out with foam (where practical) will do an excellent job. The hood

is a particularly important place to start. Factory material is usually not anywhere near adequate to do an acceptable soundproofing job. It is a really just an insulator to prevent paint discoloration from the heat!

75% of noise comes through the hood! The hood must be removed and thoroughly cleaned before applying soundproofing.

Road noise can be controlled by placing soundproofing mat (or acoustical lead), on the firewall and the floorboards, good coverage is essential. FloorMat can be cut into squares and heated with a heat gun to help it conform to unusual shapes. Contact cement will hold it permanently in place. (Be sure its waterproof cement!). You can cover slits and cracks with lead tape. The walls and roof should receive the foam treatment, if practicable. Be sure to do the trunk area, as it will tend to resonate like a drum into the passenger compartment from road noise. (Volvos are notorious for this.) "Cadillac" quality comes from lots of soundproofing material and attention to details of covering every square inch with material. Long distance truckers can really benefit from soundproofing their cabs and sleepers and heavy equipment operators will find fatigue greatly reduced as their noisy environment is quieted! Again, a side benefit is the reduction of heat or cold.

- *Boats*

Most noise is generated by the engine and fully lining the engine compartment with soundproofing mat will do a marvelous job of sound reduction. Soundproofing the engine room walls and ceiling are most important in larger boats (ships). More about that in the next section!

- *Other: Businesses, Shop, Home or Office*

Businesses can really benefit by reducing noise pollution. Not only the workers, who spend long hours in the same place every

day, but customers (maybe more importantly!) will really appreciate a quieter environment. Generally, annoying noise in these areas is caused by machines and/or people. In an office or business, hard reflective surfaces tend to severely accentuate noise. This is one reason why rugs make a room quieter. Here, soundproofing foam mat can be placed in strips of one or two feet high and run along the top of walls and even attached to ceilings for impressive noise reduction. These sound absorption runners do a very effective job, the more the better!! In noisy areas such as a shop, hanging barriers are made by attaching soundproofing mat to plywood squares (both sides!), and suspending them between the offensive noise producing machine and the receiver of the noise. This works wonders. These barriers may be either permanent or temporary. If temporary, they may be moved out of the way with some sort of wheels, hinge, cable or hook arrangement. Temporary ones on casters are useful for suppressing grinding machines or other loud noises that occur at different places around the shop. (Or, for band practice in the garage!) Hanging squares are also effective in high noise areas such as machinery rooms, pizza parlors, game rooms, halls, etc. They need not be long or large enough to be very noticeable. Hang them from the ceiling in rows (at least one foot tall), and notice how the quiet develops! We have acoustical foam wedges, pyramids and for max sound control, anechoic wedges in blocks and squares for this, too.

Contact us direct for help in other noise control situations, such as architectural acoustics. We provide free consultation!

Super Soundproofing Co  
455 EAST CARMEL ST  
SAN MARCOS, CA. 92078  
Tel: (760) 752-3030  
Fax: (760) 752-3040  
[www.Soundproofing.org](http://www.Soundproofing.org)  
E-mail: [sales@soundproofing.org](mailto:sales@soundproofing.org)

### To The Pilot, Mechanic or Installer!!

Most of the materials mentioned are available from a variety of sources. Your common hardware store has some of the items. The

### SUPER SOUNDPROOFING MAT

#### **Other materials mentioned**

Is only available from us and:

### AIRCRAFT SPRUCE & SPECIALTY

225 Airport Circle 91720

P.O. Box 4000 91718

Corona, CA. U.S.A.

1-800-824-1930 or (909) 372 9555


and

AIRCRAFT SPRUCE-EAST

900 S. PINE HILL ROAD

GRIFFIN, GA. 30223

1-877-4-SPRUCE

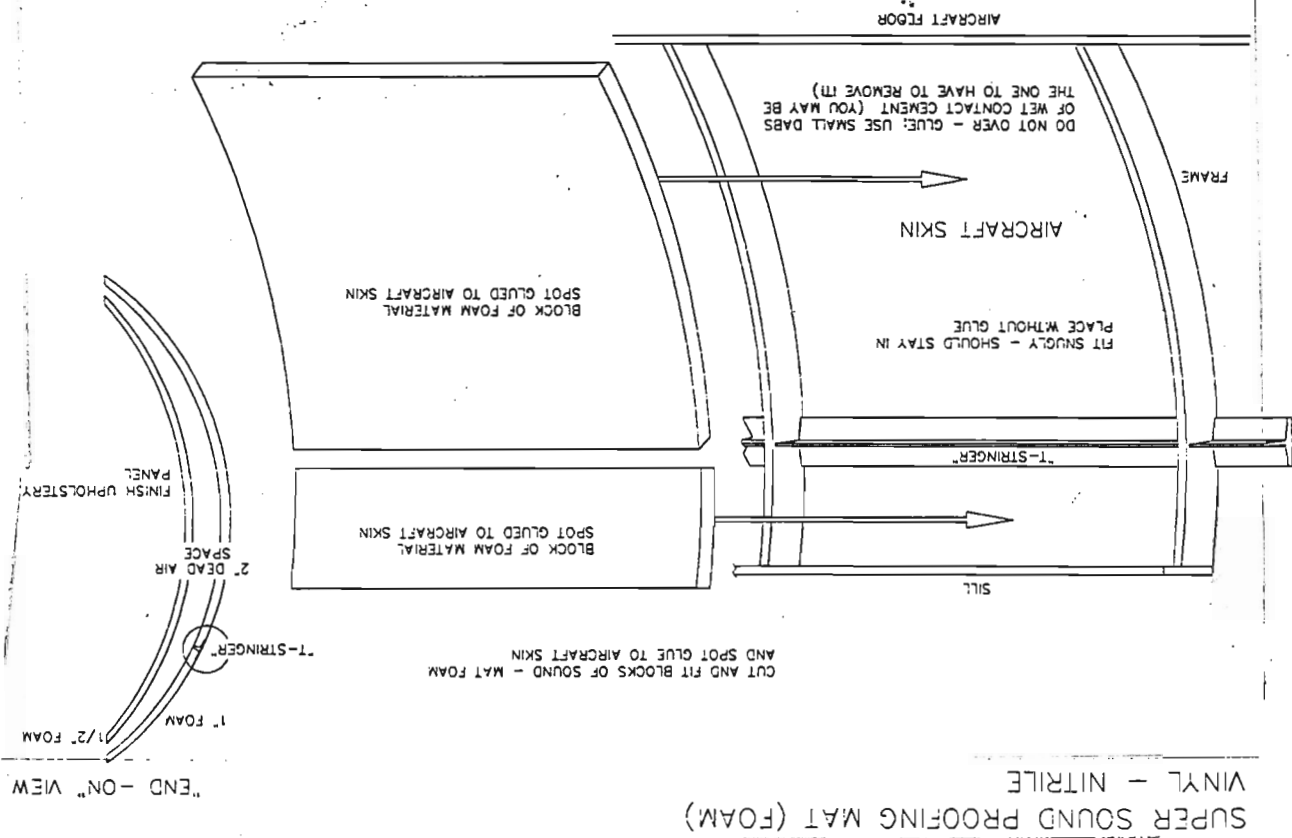

## "SNAP-IN" DECORATIVE PANELS

USE UPHOLSTERY SNAP BUTTONS IF NEEDED



COAT ALONG REAR OF PANEL EDGES WITH "PLIO-BOND" AND LET DRY FOR GOOD METAL ADHESION

LAY FINISH CLOTH OVER PANEL, PULL TIGHT TO REMOVE WRINKLES, CEMENT ALONG REAR EDGE OF ALUMINUM PANEL

POP RIVET FRAME TO STRUCTURE




1/8" SOUNDPROOFING MAT GLUED TO SHEET ALUMINUM

LEAVE 1/2" MARGIN

.015 SHEET ALUMINUM

SNIP OFF SHARP CORNERS

FRAME END VIEWS

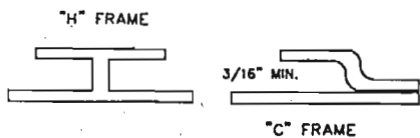

## SUPER SOUNDPROOFING PRODUCTS PRICE LIST

(and a list of our dealers too!)

**Super Soundproofing Mat:** a closed cell vinyl-nitrile foam suitable for application to cars, boats, planes, home and office, anywhere a sound absorption mat is needed. An excellent thermal insulator too! (FAA APPROVED): Prices subject to change w/o notice. Dealer prices may be slightly higher, reflecting transportation and stocking costs. A running foot is 48" width, black only. Order by the running foot or half/full 50' roll. Call for exact pricing and shipping costs.

THICKNESS	PRICE PER RUNNING FOOT	PSF WT:	RUNNING FOOT WT:	AIRCRAFT SPRUCE P/N
1/8"	\$5.45	.07	.25	09-42719
1/4"	\$10.50	.15	.6	09-42720
3/8"	\$11.85	.2	.8	09-42723
1/2"	\$14.50	.25	1.0	09-42725
3/4"	\$18.75	.350	1.5	09-42727
1"	\$20.65	.5	2.0	09-42730
1 1/2"	\$25.95	.75	3.0	09-72731
2"	\$31.50	1.0	4.0	09-42760

**"Super Soundproofing liquid"**, brush-on, specially formatted material designed to reduce reverberant noise in metal structures, ducts etc. 1 pint: \$12.95 P/N 09-42375 Qt: \$23.50 P/N 09-42740 plus shipping. **"Super Soundproofing Floor Mat"**, a heavy duty wear resistant vinyl mat with foam backing at \$8.63 per running foot 54" width plus shipping P/N 09-42750. **"Super Soundproofing Flooring"**: Same as above for homes and offices, but without the foam backing. Considerably less expensive, available only from us at \$5.88 per lineal foot. **"Super Soundproofing Tape"**, a 1/8" by 2" tape with self-adhesive backing. Same material as above mat. Wrap pipes, ducts or stick on metal panels to reduce noise transfer and vibration. P/N: 09-42745 30' roll: \$14.00 plus shipping.

To Order Items With P/N: order from the dealer closest to you. Have the P/N and credit card handy. Prices are plus shipping and California sales tax of 7.75%.